



DRAINMAX Tunnel middle tunnel with 1600 Litre for class SLW 60

Code: **DM-T1600-M/60**

Article number: **500150**

EAN: **4251173100301**

Quick Overview

- middle tunnel of 1600 litres
- for loading capacity SLW 60
- with DIBt®-approval
- washable floor
- best price per m³




Product Description

The DIBt®-approval is one innovation of the DRAINMAX Tunnel infiltration system. It is a 1.6 m³ large volume and light plastic tray system that creates a hollow space in the soil. With these, the rain water can be directly retained at the source and will infiltrate through the open soil and side holes. It is possible to also restrict the water flow to only the pipe. This technology saves significant costs on laying complex piping systems. You can also use the DRAINMAX tunnel system for infiltration of effluent water from sewage plants.

Shipping

Gross weight (incl. packaging)	32 kg
Net weight	32 kg
Weight EU-pallet max. quantity	690 kg
Max. quantity per EU-pallet	20 Stk
Volume EU-pallet max. quantity	7.21 m³
HS-Code	39269097

Technical Drawing

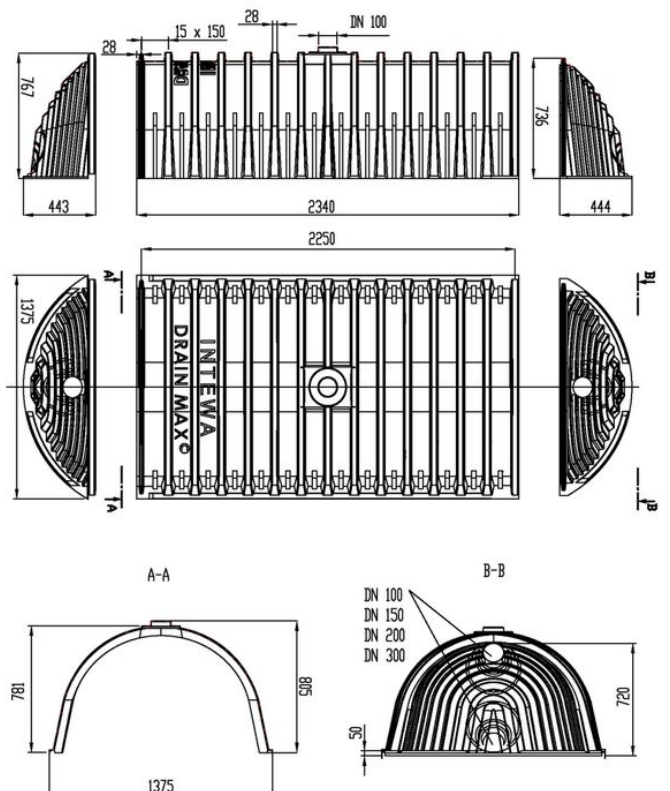

Technical Data

Length

2340 mm

Width	1375 mm
Height	781 mm
Net weight	32 kg
Effective usable length	2.250 m
Permitted tolerance	4 %
Connection, manhole	805 mm
Color	Black
Loading class	SLW 60
Material	PE-HD
Permitted processing temperature	+2 - +30 °C
Storage volume	1600 l

Information

E-Mail: info@intewa.com (<http://www.intewa.com>)

Copyright © 2017 • INTEWA GmbH Aachen

(ver. 1.9.1.0)